

## TECHNICAL SPECIFICATION


<b>CABLE TYPE</b>	<b>FT-200 COAXIAL CABLE</b>
-------------------	-----------------------------

### STRUCTURE

Conductor	Composition (No./mm)	1/ 1.12mm	
	Material	Bare Copper Wire	
	Outside Diameter (mm)	1.12±0.03mm	
Insulation	Material	Foamed Polyethylene	
	Thickness (mm)	0.91mm	
	Nom. Diameter (mm)	2.95±0.1mm	
Shield	Material	Double Side Aluminum Foil	Copper Wire
	Construction	0.038	16 * 6/0.12mm
	Coverage		
	Diameter (mm)		0.12±0.08mm
Jacket	Material	PVC	
	Diameter	4.95±0.15mm	
	Color	Black	
Printing			

### ELECTRICAL CHARACTERISTIC

Impedance	Ω	50±3						
Insulation Resistance	MΩ/km	1000 ↑						
Capacitance	pF/M	80.4±3						
Attenuation	Frequency[MHz]	30	150	450	900	1500	1800	2500
	dB/100M	5.8	12.2	21.8	31.2	41.3	45.3	54.6

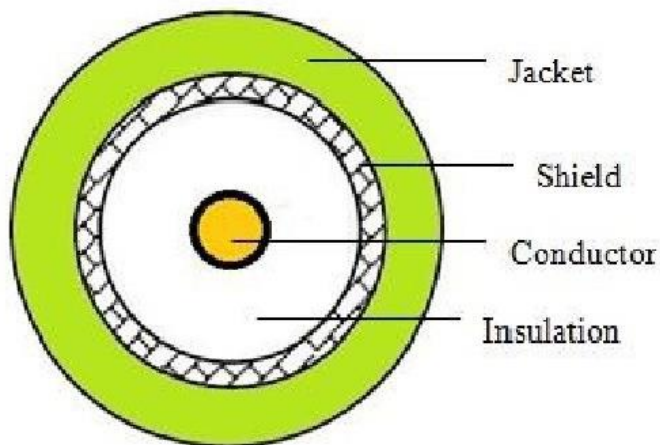

DRWN.		DRWN. NO:
CHKD.	S.H.Liu	
APPD.	Chang L D	Date:2018/08/22