

Mini Goose Nech Microphone for Hands-Free Installations

DESCRIPTION

- > Ensures optimum signal to noise ratio.
- > Quick and simple mounting and connection.
- > Also available in grey colour
- > Can be bent over and over again without weakening of the ability of keeping position.
- > High-sensitivity built-in electret cartridge with amplifier.
- > Voltage supply 9–15 VDC when connected as shown in the diagram below.
- > Supplied with 4 m cable.



ORDERING


Model	Product No.
DM 8320	270000036

SPECIFICATIONS

Electrical	
Model	DM 8320
Type	Goose neck microphone
Pattern Type	Non-directional
Impedance	1 k Ω
Frequency Response	Shown in diagram below
Power Supply	Nominal: 2 V. (Max. 10 V)
Current Consumption	Approx. 0.5 mA
Sensitivity	-46 dB +/- 3 dB at 1 kHz rel. 1 V/Pa
Mechanical	
Cartridge Type	Electret
Materials	Aluminium and ABS
Cable	4 m 1-wire with shield
Dimensions	Approx. 180 mm
Weight	0.075 kg / 0.17 lb
Environmental	
Operating Temperature Range	Operating : -25° C to + 55° C Storage : -40° C to + 55° C

ADDITIONAL DATA

TYPICAL RESPONSE CURVES

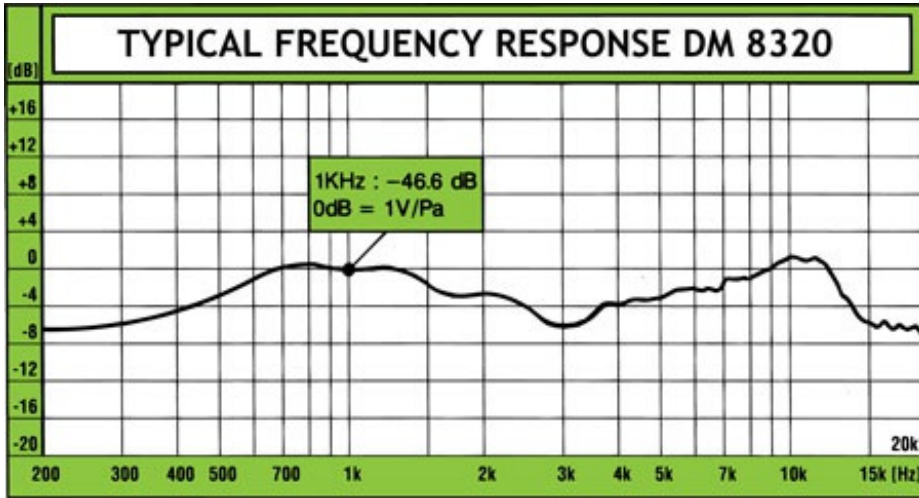

WIRE DIAGRAM

