



ComAnt[®] Communications Antennas

FREQUENCY INDEPENDENT DATA

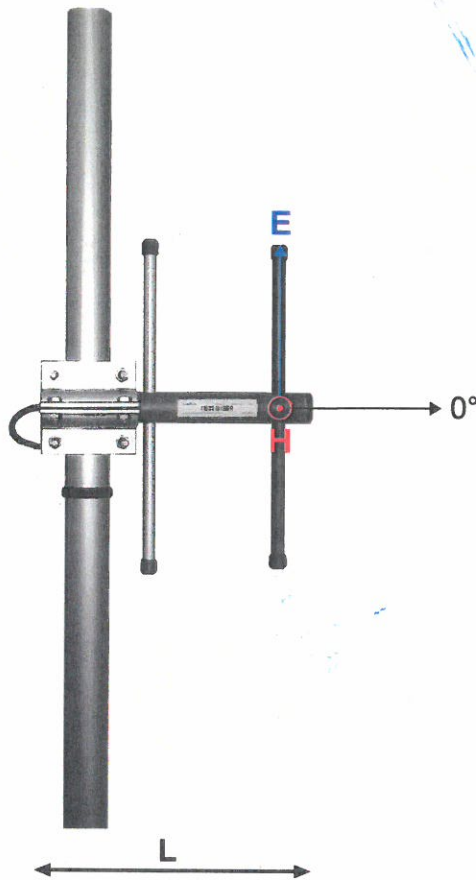

Description:	directional yagi
Frequency:	135-145 MHz, 144-156 MHz, 154-166 MHz, 163-177 MHz, 221-239 MHz, 326-353 MHz, 336-364 MHz, 365-395 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 880-960 MHz
Impedance:	50 ohm
Gain:	6 dBi
H -3 dB:	174°
E -3 dB:	77°
F/B:	11 dB
Polarization:	vertical/horizontal
Connector:	N-female/TNC-female
VSWR:	< 1.5
Radome:	UV resistant ABS/FG, RAL 7012, PU foam filling copper
Radiator:	
Passive elements:	coated aluminium
Attachment:	∅ 35-60 mm, aluminium alloy bracket, stainless steel V- bolts and self locking nuts
Lightning protection:	DC-short circuited
Temperature:	-40° - +80°C
IP:	67

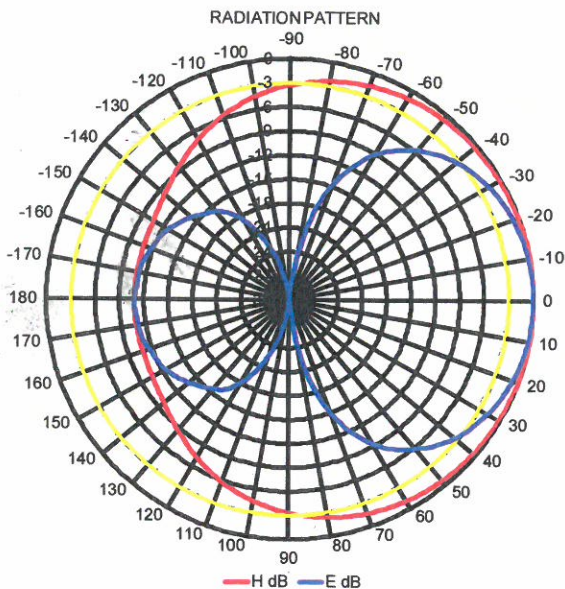

HOLUND
HOLUND ELEKTRONIKK AS

CAY DIRECTIONAL YAGI